

SRC045系列 (防水型)


SRC045 Series (Waterproof)

型号 TYPE



SRC045-6

外形尺寸 OUTLINE DIMENSION 单位UNIT (mm)

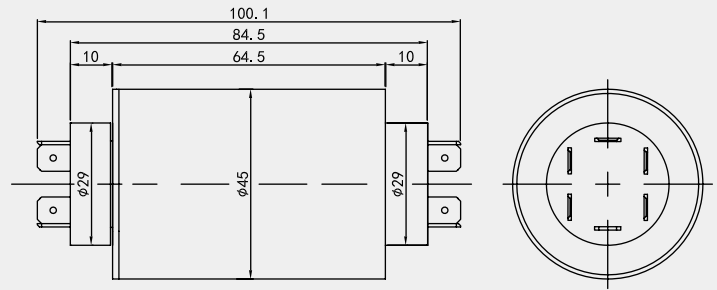


型号 TYPE



SRC045-8

外形尺寸 OUTLINE DIMENSION 单位UNIT (mm)

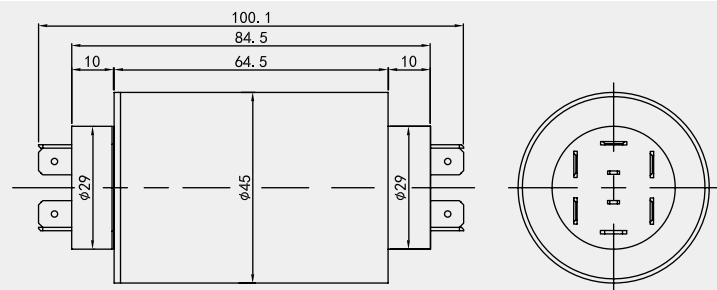

规格表 Specification List

型号 Type	路数 NO. of Circuits	额定电流 (Amps) Rated Current Amps		外形尺寸 Outline Dimension OD x L	镀金 扁平接头 Pin Thickness x Width
		5	20		
SRC045-6	6	-	6	Φ45 x 64.5	0.8 x 6.3
SRC045-8	8	2	6	Φ45 x 64.5	0.8 x 6.3 0.8 x 2.8

电气技术指标 Electrical data

额定电压 Rated Voltage	240VAC / VDC
绝缘体强度 Dielectric Strength	500VAC@50Hz, 60s
绝缘电阻 Insulation Resistance	1000MΩ/500VDC
动态电阻变化值 Electrical Noise	≤10mΩ

机械技术指标 Mechanical data

额定转速 Rated Speed	0~250rpm
工作温度 Temperature Range	-20℃ ~ +80℃
工作湿度 Operating Humidity	60%RH 或更高 60%RH or higher
接触材料 Contact Material	贵金属 Precious Metals
壳体材料 Housing Material	工程塑料 Engineering Plastics